





INSTRUCTIONS

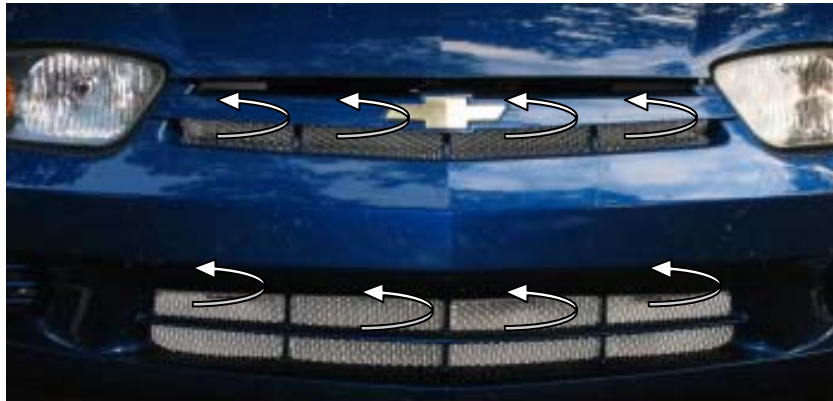


Materials needed: Grills
Neednose pliers

Estimated Install time: 30 Minutes

1. Read instructions before installation.
2. Assemble the bottom part.
 - a. Take 2 clips for one section.
 - b. Hook the two prongs from the clip around the two adjacent diamonds. There are precut areas on the grill for these that are about 4-5 diamonds away from the edge on one side and about a dozen on the other side.
 - c. Clamp down on the hook until it meets the back.

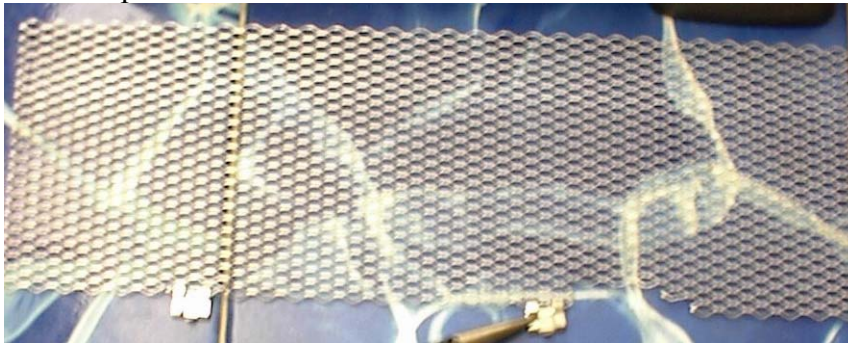

- d. Now turn the grill around and tighten down the clamping part of the clip to the desired tension. Just take your pliers and close the gap down as far as you want. If you don't tighten them down enough, they will not hold and if you tighten them too much it will be hard to install.

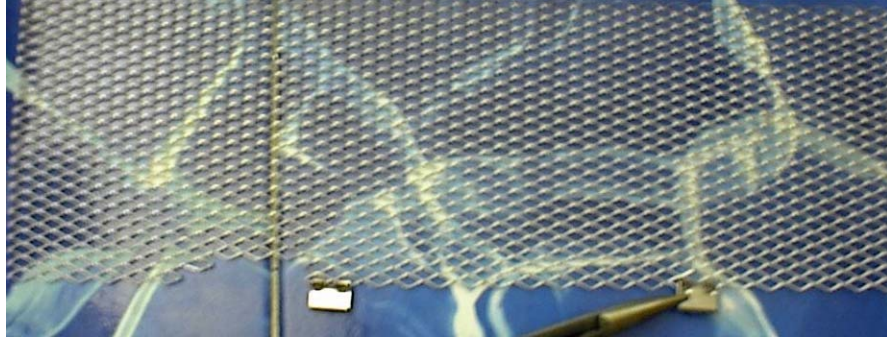


e. Push the clips forward so they look like this.



f. Repeat for other bottom grill.

3. Assemble the top part.

- a. Take 2 clips for one section.
- b. Hook the two prongs from the clip around the two adjacent diamonds. There are precut areas on the grill for these that are about 5-6 diamonds away from the edge.
- c. Clamp down on the hook until it meets the back.

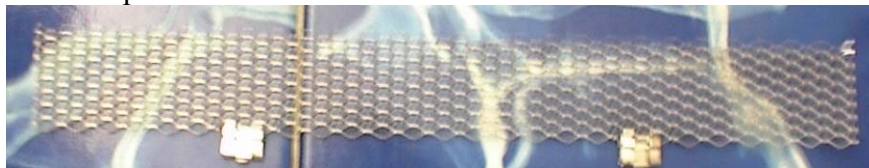

- d. Now turn the grill around and tighten down the clamping part of the clip to the desired tension. Just take your pliers and close the gap down as far as you want. If you don't tighten them down enough, they will not hold and if you tighten them too much it will be hard to install
 - e. Push the clips forward
 - f. Repeat for other top grill
4. Put the grill inserts behind the openings and center the grill insert and push the clips onto the existing grill. You may have to get under the car to accomplish this.
- a. The bottom pieces have notches in them to accommodate the stock bulge in the bumper. Place the pieces accordingly.

- b. The top pieces will require removal of the splash guard first.



- c. The push screws are located in the circled areas or possible elsewhere depending on model.
- d. Remove the splash guard and install the grills on the plastic lip from behind.
5. The clips should be near the arrows on the first page picture.